

Selecting Head Protection for Construction Work

A traumatic brain injury (TBI) is an injury that affects how the brain works. It can be caused by a bump, blow, jolt, or penetrating injury to the head. TBIs can be mild, but more serious TBIs can lead to disability and even death.¹


Based on historical data, over 50,000 nonfatal work-related TBIs are treated on average annually in United States (US) emergency departments.² Nonfatal TBIs can be life-altering events; 43% of hospital patients treated for a TBI did not attend ordinary work for five years after their injury, which means these individuals were receiving a social transfer payment such as sickness absence benefits, experiencing short- or long-term sickness, or had died.³ Among all US industries, construction has the highest number of both nonfatal² and fatal work-related⁴ TBIs. **Between 2003 and 2010, 2,210 construction workers died from a TBI.** These deaths represented 25% of all construction fatalities and 24% of work-related TBI fatalities among all industries during the same period.⁵ More recent data show a similar pattern, with 2,297 fatal intracranial injuries in construction from 2015 to 2022.⁶

Construction workers are at higher risk for TBIs because, in their work environment, they may be struck by falling or flying objects and may experience different kinds of slips, trips, and falls – from falls on the same level to falls from ladders and equipment to falls from multi-story buildings or scaffolding dozens of feet in the air. Over a third of all nonfatal work-related TBIs are attributed to falls, and among workers 55 years and older, the majority result from same level falls.² **When it comes to fatal work-related TBIs, more than half are caused by falls, especially from roofs, ladders, and scaffolds.⁵**

Wearing protective headgear, such as a hardhat or helmet, is essential for reducing the risk of a TBI. A study by Kim et al. found individuals who had a work-related fall and were wearing a safety helmet were less likely to have head injuries compared to individuals who were not wearing a safety helmet.⁷ Protective headgear should be selected based on your trade, type of work, and work environment. Rather than recommending a one-size-fits-all solution, the goal of this guidance document is to provide you with information on types of protective headgear, factors to consider, and additional resources.

Acknowledgements

CPWR – The Center for Construction Research and Training would like to thank its [Expert Evaluation Panel on Construction Headgear](#) for their feedback throughout the inception and development of this document. In 2023, CPWR convened experts from academia, labor, government, manufacturing, and others to participate in an evaluation panel on the use of helmets with chin straps versus traditional hardhats. **The goal of this expert evaluation panel was to: (1) assess industry awareness and adoption of Type II protective headgear and protective headgear with chin straps over**

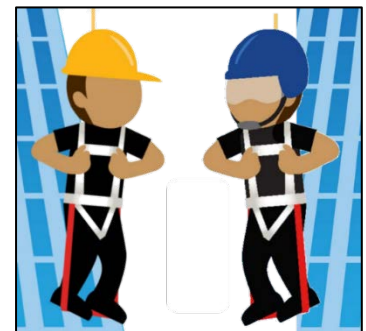

time; and (2) establish and disseminate recommendations for use of protective headgear.


The information that follows does not represent the individual views of any one person or organization on this panel. Participants were consulted for their expertise, but all final decisions regarding this guidance were made by CPWR.

Please note: This is a living document and will be updated when new information becomes available. Visit <https://cpwr.com/research/preventing-head-injuries> for the most up-to-date version. Construction helmets are emerging technologies and new research is being conducted on how to rate helmets for safety. We encourage you to speak with manufacturers about different options that are available.

Hardhats vs. Helmets: What's the Difference?

Depending on where you look or who you talk to, the terminology used around hardhats and helmets can be confusing and sometimes contradictory. The current ANSI/ISEA Z89.1 standard refers to all approved headgear as “protective helmets” or “head protection devices,”⁸ and the Occupational Safety and Health Administration’s (OSHA) standard refers to both “protective helmets” and “head protection.”⁹ Neither use the term “hardhats.” Despite this, many in the industry have historically referred to protective headgear as “hardhats” and are now using the term “helmets” to refer to the newer styles of headgear.

One goal of this guidance document is to clarify that this use of “hardhats” vs. “helmets” is a stylistic differentiation and does not provide all necessary safety information to make an informed decision regarding protective headgear. The difference between a “hardhat” and a “helmet” is not currently outlined in the ANSI or OSHA standard and therefore is up to the discretion of the manufacturer. We anticipate an update to the ANSI/ISEA Z89.1 standard that clarifies the differences between the two overarching types of headgear and will update this document accordingly if/when that occurs. For the time being, we are differentiating the two as follows: **Hardhats** typically refer to the traditional style of head protection, which often includes a bulkier shell, a brim, and may or may not be equipped with a chin strap. Part of the reason some hardhats may feel bulkier is they are often built with a webbed ribbon-style suspension system with a gap built in to absorb impacts or penetration. **Helmets**, on the other hand, typically refer to a climbing style of headgear that is more rounded and consistently has a chin strap. Instead of a webbed suspension, they may have a foam liner or a combination of a webbed suspension and a foam liner.

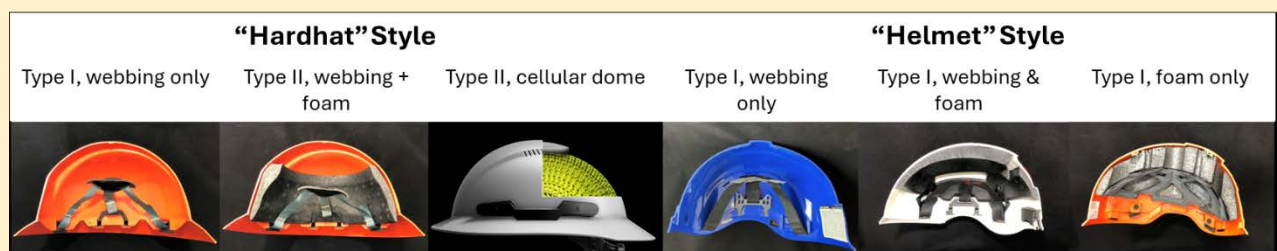

Images courtesy of Dr. Michael Bottlang. Photos show examples of suspension and padding types only and do not make up a comprehensive list or guide.

The OSHA Construction Head Protection standard (CFR 1926.100) requires ALL protective headgear to be tested and designated as either Type I or Type II according to the guidelines in the ANSI/ISEA Z89.1 standard. Furthermore, all protective headgear can be rated for additional hazards such as electricity and can be equipped with a chin strap. For these reasons, it is important to focus more on the protective characteristics and other features when selecting protective headgear and less on the style.

Research indicates that Type II headgear provides more complete protection than Type I headgear, but the protection of Type I headgear may be improved with the addition of certain liners. For those interested in some of the published research, a list can be found at <https://cpwr.com/research/preventing-head-injuries>. Additional studies are currently underway and are expected to provide further clarity to the issue of efficacy between head protection options.

Type I vs. Type II Headgear: What's the Difference?

OSHA, the only body that regulates construction safety and health nationwide, mandates in CFR 1926.100 that “employees working in areas where there is a possible danger of head injury from impact, or from falling or flying objects, or from electrical shock and burns, shall be protected by protective helmets.” The OSHA standard cites the ANSI/ISEA voluntary consensus standard, Z89.1. The current OSHA rule states employers must provide each employee with head protection that meets the specifications contained in the following versions of the standard: Z89.1-2009, Z89.1-2003, or Z89.1-1997. There has been a more recent consensus standard approved in May 2014 and updated and reaffirmed in April 2019. OSHA CFR 1926.100 also specifically states head protection for each employee exposed to high-voltage electric shock and burns must meet specifications contained in Section 9.7 of any of these consensus standards.⁹

The ANSI/ISEA standard identifies two categories for industrial headgear testing: Type I and Type II. *Remember, these testing categories apply to ALL protective headgear regardless of whether it's designated as a hardhat or helmet.* To ensure the protective headgear you are purchasing meets the Type I or Type II testing requirements, you can request a Certificate of Compliance and/or a Declaration of Conformity from the manufacturer which states the protective headgear has been produced in conformance with applicable specifications and outlines the standards and level of protection it meets.

Type I and Type II testing both share the same performance requirements for flammability, force transmission, apex penetration, and electrical classifications, but differ on other measures. Most significantly, **Type I testing only evaluates impacts at the apex (top) of the headgear, whereas Type II testing also tests impact energy attenuation and penetration resistance for off-center impacts to the front, back, and sides of the tested headgear.**

The ANSI/ISEA standard does not require the inclusion of a chin strap for retention and there are no design



requirements for chin straps on Type I headgear. However, **if Type II protective headgear does have a chin strap, it must meet width, retention, and elongation requirements in the standard.**

Key Elements of ANSI Type I & II Testing for Industrial Head Protection⁸

	Type I	Type II
Flammability	A flame cannot be visible five seconds after the test flame is removed from the surface of the headgear.	
Force Transmission (Figure 1)	<ul style="list-style-type: none"> Headgear may not transmit a force to the test headform that is greater than 4,450 Newtons, or 1,000 pounds. If headgear is preconditioned, for each stated precondition, an average will be calculated of the maximum transmitted force of individual test samples. Averaged values should not be greater than 850 pounds of force. 	
Apex Penetration (Figure 2)	No contact can be made between the penetrator and the top of the test headform.	
Electrical Classification (Class G, Class E, or Class C)	<ul style="list-style-type: none"> Class G headgear must be able to withstand 2,200 volts for one minute and maximum leakage cannot be greater than three milliamperes. Class E headgear must be able to withstand 20,000 volts for three minutes following impact (force transmission) and maximum leakage cannot be greater than nine milliamperes. Class C headgear is not required to be tested for electrical insulation. 	
Impact Energy Attenuation (Figure 3)		Impact energy is evaluated by dropping the headgear at a range of angles onto a spherical object that is above a dynamic test line. Acceleration shall not be greater than 150g.
Off-Center Penetration (Figure 4)		The headgear is rotated at various angles above a dynamic test line while a penetrator is dropped vertically. The penetrator cannot make contact with the test headform.
Chin Strap retention (optional) (Figure 5)		Chin straps are not required for Type II headgear. However, if a chin strap is provided, it shall be tested for retention and must meet width and elongation requirements. Chin straps must be at least 0.5 inches wide. Strap elongation cannot be greater than 1 inch.

Figure 1: **TYPE I & TYPE II**
FORCE TRANSMISSION TESTING

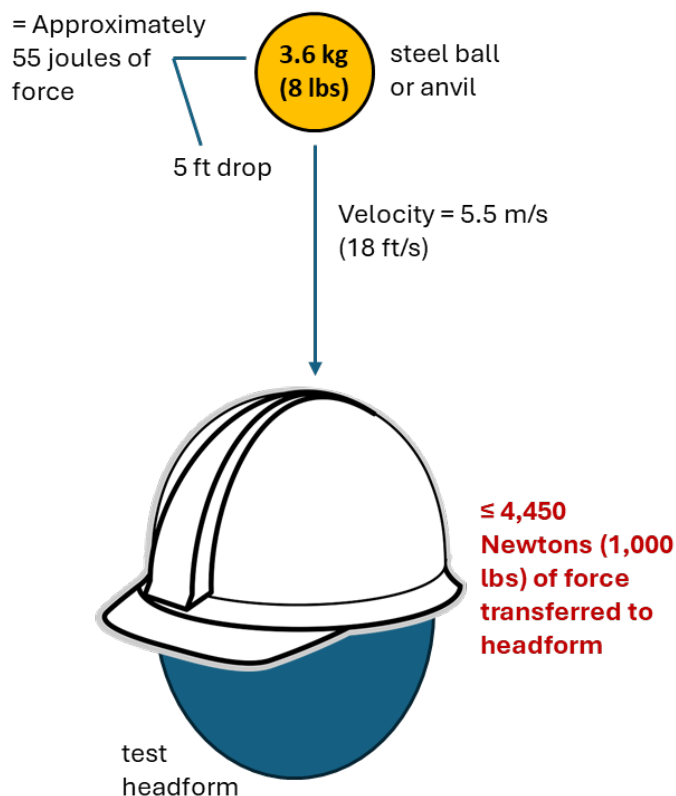


Figure 2: **TYPE I & TYPE II**
APEX PENETRATION TESTING

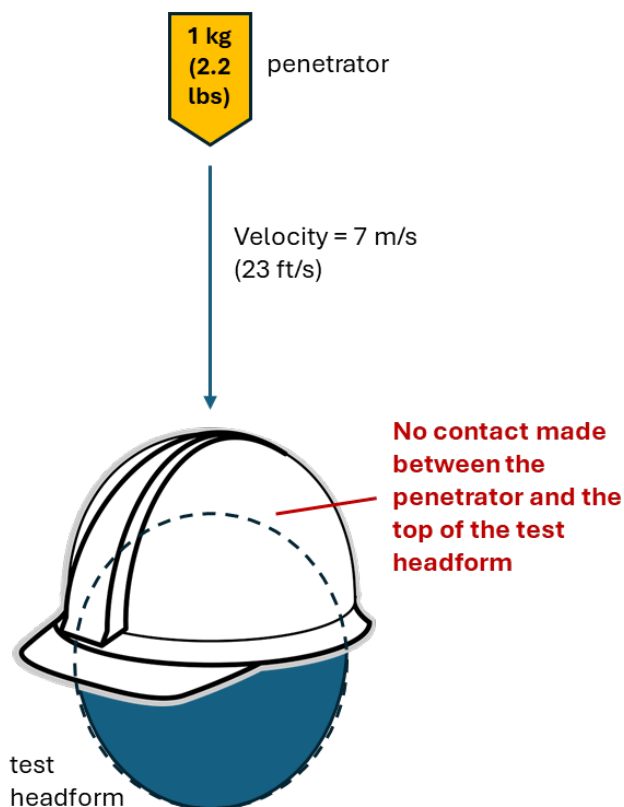


Figure 3: **TYPE II ONLY**
IMPACT ENERGY ATTENUATION

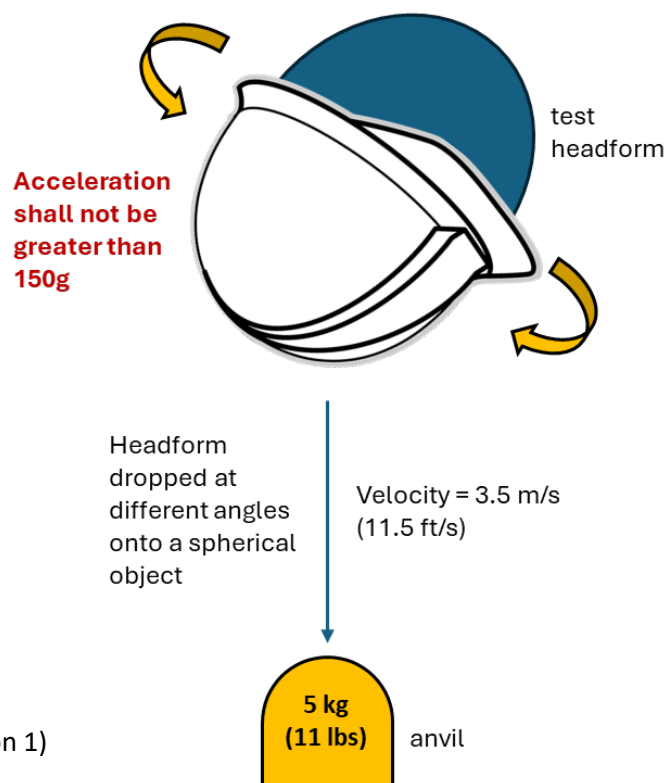


Figure 4: **TYPE II ONLY OFF-CENTER PENETRATION TESTING**


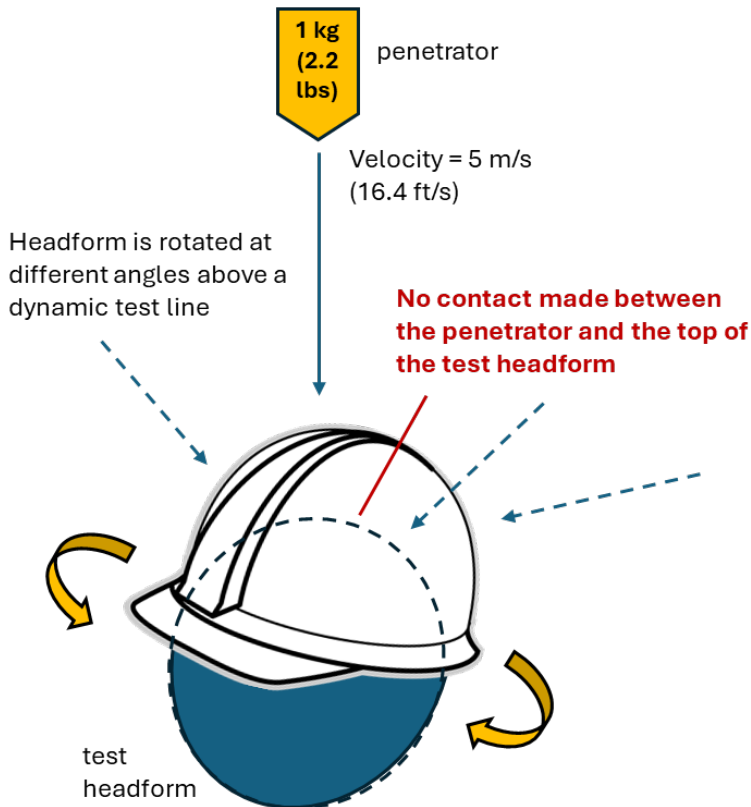


Figure 5: **TYPE II CHIN STRAP RETENTION**

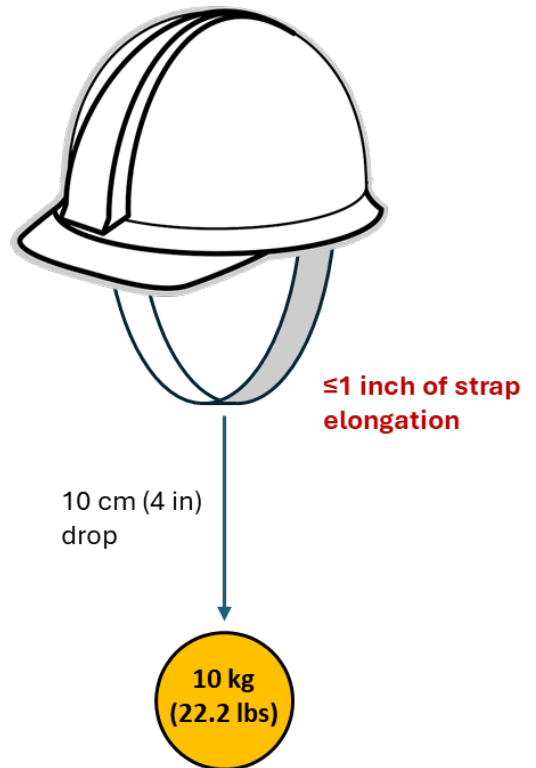

Additional Testing for Headgear

Some U.S. manufacturers also use criteria from the European Standard for Mountaineering Helmets (EN 12492) to test their head protection products. As the name suggests, this is not a construction industry standard. The EN 12492 standard includes vertical, front, side and rear energy absorption capacity testing and retention system testing, including testing of chin straps. **Head protection that passes testing for both the ANSI/ISEA Type II standard and the EN 12492 standard may be the most protective, however EN 12492 is neither a substitute nor equivalent to Z89.1.** Lateral impact testing in EN 12492 is less stringent than Type II testing for three reasons: less impact energy, less coverage, and a flat instead of more focused hemispherical impactor. The EN 12492 standard allows more force to be passed from the helmet to the headform (or head/neck).

Making Your Selection: Primary Factors to Consider

The first step in deciding what protective headgear to purchase or wear is conducting a hazard analysis or risk assessment. The level and type of protection needed, along with stylistic choices and accessories, is influenced by the tasks being done and the work environment. Some factors to consider include:

1. Work at Heights

Consider purchasing Type II protective headgear with a chin strap for the best protection of workers at heights but be aware that even if your work does not involve work at heights, workers can still experience a fall on the same level if they trip or slip. Chin straps secure headgear to your head and will help prevent it from slipping off your head when bending over or in the event of a fall. Construction helmets have a built-in chin strap, while many hardhats do not (you can, however, purchase a chin strap to attach to a hardhat). If a fall does occur, it's possible for a worker to hit their head on an object or objects as they fall. For this reason, protection from impact on both the top and sides of the head may be best for those working at heights at or above 6 feet. Some manufacturers are even starting to consider products that can minimize rotational force to the head. Rotational forces are thought to be important in causing brain injuries, including concussion. Using new materials and technologies to dampen torque and the associated movement of the brain inside the skull has been shown to decrease risk for brain injury in some studies.^{10,11}

2. Slips, Trips, and Falls at the Same Level

You don't have to be working at heights to experience a fall. Many TBIs occur from slips, trips, and falls at the same level.^{3,11} Like falls from heights, workers can hit their head on the ground or an object as they fall. Type II head protection will provide better protection to the front, back and sides of the head, and a chin strap will keep the protective headgear in place.

3. Locations of Surrounding Work

Part of the reason for wearing headgear is to protect workers from falling and flying objects. If workers are consistently operating on one level away from unsecured objects that could fall from heights or fly across space, Type I headgear may be sufficient. However, only about 15% of impacts occur to the headgear crown¹² and the vast majority of impacts occur to the front, side, and rear. This makes Type II protective headgear the safer choice in any working environment, but especially when there is overhead work that could lead to objects falling from heights or unsecured materials nearby that could fly away.

4. Use of Accessories

Different accessories can be attached to protective headgear, such as face shields and hearing protection, to protect workers from various hazards. Construction helmets are still relatively new to the market, so there may be fewer accessory options available (e.g., welding hoods) compared to hardhats, which have been around for longer. Talk to your manufacturer as there are constantly new devices and accessories hitting the market.

5. Electrical Hazards

In addition to Type I and Type II classifications, the ANSI/ISEA Z89.1 standard provides hazard-specific categories for headgear: Class C, Class E, and Class G. Class G and Class E headgear must meet performance requirements for electrical classifications. Class G (General) headgear is intended to reduce the danger of contact with low-voltage conductors and electrical hazards to the head only. It must be able to withstand 2,200 volts for one minute and maximum leakage cannot be greater than three milliamperes. Class E (Electrical) headgear is intended to reduce the danger of contact with higher voltage

conductors and hazards to the head only. It must be able to withstand 20,000 volts for three minutes following impact and maximum leakage cannot be greater than nine milliamperes. Class C (Conductive) headgear is not required to be tested for electrical insulation and may include venting and other options not allowable in headgear that provides electrical protection.⁸ Class C should only be used by workers with no risk of electrical exposure.

6. Weather and Temperature

Construction workers are exposed to varying weather conditions and temperatures at work. Existing research on head protection and temperature focuses on heat. Ventilation is an option on Class C protective headgear to help circulate air, which keeps the head cool and dry in warmer environments. It is not an option for Class E and G headgear meant to provide protection against electrical hazards. The findings from research studies, however, differ regarding the possible benefits of ventilation.^{13,14} How hot protective headgear gets also depends on its color, with lighter colors absorbing less solar radiation and generating less heat than darker colors.¹⁵ In addition, cold weather is also a consideration for product selection, because some cold weather head protection accessories are only compatible with specific head protection models. ANSI provides guidance on optional protective headgear features including preconditioning for high and low temperature applications.⁸

7. Visibility Needs

Depending on the time and location of work (e.g., road work), it may be helpful to have high visibility headgear. ANSI provides non-mandatory requirements for protective headgear to be marked as high visibility (HV). To earn the HV marking, construction protective headgear must demonstrate the appropriate levels of chromaticity and luminance factor.⁸

8. Cost

Construction helmets are currently more expensive than hardhats. A hardhat typically costs between \$10-30, while a helmet can cost between \$55-150. However, construction helmets have a five- to ten-year service life, depending on the manufacturer and factors such as impact, penetration, chemical exposure, and sun exposure. Traditional hardhats with strap suspensions, on the other hand, generally need to be replaced more often. The typical service life of hardhats ranges from two to five years, and the suspension should be replaced every year. The need to purchase fewer helmets over the years may outweigh the initial costs of construction helmets. In addition, as helmets gain more acceptance and new companies enter the market, the cost may decrease. Always talk to your manufacturer about the lifespan of the headgear – it can vary even with different products from the same manufacturer!

9. Fit and Comfort

The overall look and fit of construction helmets are different from hardhats. Some experts contend that construction helmets are less bulky, more comfortable, and offer a better fit than hardhats, while others say chin straps can be uncomfortable and cause chafing and irritation.¹⁶ This may be dependent on the wearer and their head shape/size, amount of hair, and hair style. Hardhats and construction helmets both range in weight, from around 0.75 pounds to slightly more than a pound. It should be noted that, while they offer additional protection compared to Type I headgear, Type II hardhats and helmets tend to be

heavier than Type I due to the additional padding. Shifting to helmets may be difficult for some workers who have spent years wearing hardhats. Others may welcome a style of headgear they are familiar with from sports activities.

Additional Resources

- [Hardhats to Helmets](#) provides information on the transition from hardhats to helmets, including research and development, information on manufacturers, and success stories.
- [National Institute for Occupational Safety and Health \(NIOSH\) Science Blog: Construction Helmets and Work-Related Traumatic Brain Injury.](#)
- [Hard Hats and Helmets. Keeping Workers Safe:](#) A video by ISEA and NIOSH.

References

1. Centers for Disease Control and Prevention. *Get the Facts About TBI.* https://www.cdc.gov/traumaticbraininjury/get_the_facts.html
2. Konda, S., Reichard, A., Tiesman, H.M., & Hendricks, S. (2015). Non-fatal work-related traumatic brain injuries treated in US hospital emergency departments, 1998-2007. *Injury Prevention, 21*(2), 115–120. <https://doi.org/10.1136/injuryprev-2014-041323>
3. Graff, H.J., Siersma, V., Møller, A., Kragstrup, J., Andersen, L.L., Egerod, I., & Rytter, H.M. (2019). Labour Market Attachment after Mild Traumatic Brain Injury: Nationwide Cohort Study with 5-Year Register Follow-up in Denmark. *BMJ Open, 9*(4), e026104. <https://dx.doi.org/10.1136/bmjopen-2018-026104>.
4. Tiesman, H.M., Konda, S., & Bell, J.L. (2011). The Epidemiology of Fatal Occupational Traumatic Brain Injury in the U.S. *American Journal of Preventive Medicine, 41*(1), 61–67. <https://doi.org/10.1016/j.amepre.2011.03.007>
5. Konda, S., Tiesman, H.M., & Reichard, A.A. (2016). Fatal traumatic brain injuries in the construction industry, 2003-2010. *American Journal of Industrial Medicine, 59*(3), 212–220. <https://doi.org/10.1002/ajim.22557>
6. U.S. Bureau of Labor Statistics. *2015-2022 Census of Fatal Occupational Injuries.* <https://www.bls.gov/iif/>
7. Kim, S.C., Ro, Y.S., Shin, S.D., & Kim, J.Y. (2016). Preventive Effects of Safety Helmets on Traumatic Brain Injury after Work-Related Falls. *International Journal of Environmental Research and Public Health, 13*(11), 1063. <https://doi.org/10.3390/ijerph13111063>
8. ANSI/ISEA. (2019). *ANSI/ISEA Z89.1-2014 (R2019). Revision of ANSI/ISEA Z89.1-2009.* Proprietary Document.
9. Occupational Safety and Health Administration. (2012). Occupational safety and health standards: Occupational health and environmental control (Standard No. 1910.100). Retrieved from: <https://www.osha.gov/laws-regs/regulations/standardnumber/1926/1926.100>
10. Goutnik, M., Goeckeritz, J., Sabetta, Z., Curry, T., Willman, M., Willman, J., Thomas, T.C., & Lucke-Wold, B. (2022). Neurotrauma Prevention Review: Improving Helmet Design and Implementation. *Biomechanics, 2*(4), 500–512. <https://doi.org/10.3390/biomechanics2040039>

11. Brolin, K., Lanner, D., & Halldin, P. (2021). Work-related traumatic brain injury in the construction industry in Sweden and Germany. *Safety Science*, 136, 105147. <https://doi.org/10.1016/j.ssci.2020.105147>
12. Gilchrist, A., & Mills, N.J. (1987). Construction Site Workers Helmets. *Journal of Occupational Accidents*, 9(3), 199-211. [https://doi.org/10.1016/0376-6349\(87\)90012-5](https://doi.org/10.1016/0376-6349(87)90012-5)
13. Davis, G.A., Edmisten, E.D., Thomas, R.E., Rummer, R.B., & Pascoe, D.D. (2001). Effects of ventilated safety helmets in a hot environment. *International Journal of Industrial Ergonomics*, 27(5), 321-329. [https://doi.org/10.1016/S0169-8141\(00\)00059-7](https://doi.org/10.1016/S0169-8141(00)00059-7)
14. Ueno, S., & Sawada, S.I. (2019). Effects of ventilation openings in industrial safety helmets on evaporative heat dissipation. *Journal of Occupational Health*, 61(2), 157–164. <https://doi.org/10.1002/1348-9585.12024>
15. Smith, J. & Throop, W. (2006). *The Effect of Color on Temperatures Inside Hardhats*. United States Department of Agriculture Forest Service. <https://www.fs.usda.gov/t-d/pubs/pdfpubs/pdf06512312/pdf06512312dpi72.pdf>
16. CPWR – The Center for Construction Research and Training. (2023). *CPWR Expert Evaluation Panel on Hardhats vs. Helmets: Results & Next Steps from Survey #1* [Unpublished].